



printhead cleaner built in your ribbon.

- Built right into your thermal transfer ribbons
- Preventative maintenance
- Fast and easy to use
- Maintains excellent print quality
- Prolongs printhead life
- Minimizes costly downtime



Wax/Resin



Technical Specifications

Color Code Tab.....	Copper
Maximum Print Speed	24 IPS
Film Thickness.....	4.5 Microns
Total Ribbon Thickness...	7.6 Microns
Transmission Density	1.10
	MacBeth
	Scale
Ink Melting Point.....	70°C/158°F

Near Edge Wax/Resin


Fast Processing

Benefits

- Specially developed for near edge printers
- Produces exceptionally black bar codes and images with no show through
- Broad stock latitude, prints well on both rough, uncoated stocks and smooth, coated stocks
- Mid-range scratch and smear resistance
- Print speeds up to 24 IPS in flexible packaging

Recommended Stock

Coated and Uncoated
 Polyolefin (i.e. Tyvek)
 Paper Tag & Label Stocks
 Polypropylene
 Polyethylene

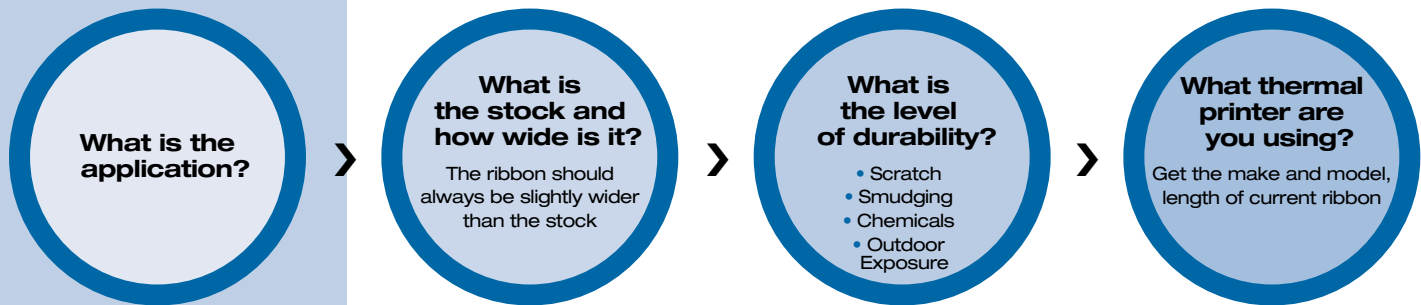

What you need to know to quote ribbon business.

Thermal Transfer Ribbon Storage Conditions

For optimal print results, thermal transfer printing should occur in the temperature range of 41° F to 95° F at 45% to 85% relative humidity. Suggested storage conditions for up to one year duration are 23° F to 104° F at 20% to 85% relative humidity. Exposing thermal transfer ribbons to direct sunlight or moisture will cause damage to the ribbons.