



printhead cleaner built in your ribbon.

- Built right into your thermal transfer ribbons
- Preventative maintenance
- Fast and easy to use
- Maintains excellent print quality
- Prolongs printhead life
- Minimizes costly downtime



Wax/Resin



Premium Wax/Resin

A Solid TTR Performer

Benefits

- Moderate scratch and smudge resistance
- Withstands multiple scans, outdoor elements, rough handling
- Notable performance on semi-gloss and glossy stocks
- Good quality when printing complex formats
- Specially formulated backcoat protects the printhead


Recommended Stock

Coated Paper Tag & Label Stocks
Polyethylene

Polypropylene
Polyester

Technical Specifications

Color Code Tab..... Green
 Maximum Print Speed 12 IPS
 Film Thickness..... 4.5 Microns
 Total Ribbon Thickness... 6.8 Microns
 Transmission Density 1.2
 MacBeth Scale
 Ink Melting Point..... 80°C/176°F

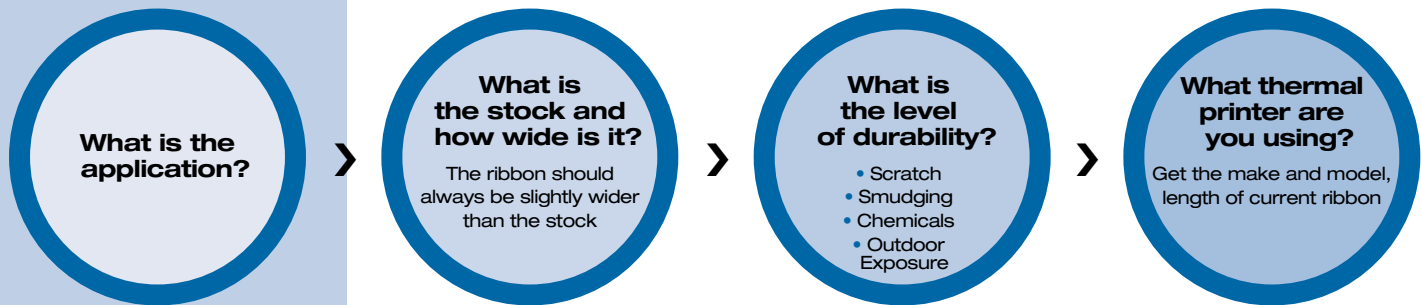

What you need to know to quote ribbon business.

Thermal Transfer Ribbon Storage Conditions

For optimal print results, thermal transfer printing should occur in the temperature range of 41° F to 95° F at 45% to 85% relative humidity. Suggested storage conditions for up to one year duration are 23° F to 104° F at 20% to 85% relative humidity. Exposing thermal transfer ribbons to direct sunlight or moisture will cause damage to the ribbons.